

# GT 804M


## 4 Channel DVR with Remote Access

### Main Features


- 4 Channel Triplex DVR
- MPEG-4 Compression Format
- Full remote access via web browser
- Remote live streaming audio
- Mobile phone and PDA remote access
- Half D1 recording with up to 100PPS in CIF mode
- Graphic User Interface (GUI) with mouse control
- IR Remote Control
- USB Backup both Video and Audio
- VGA output(Optional)



Front Panel Layout

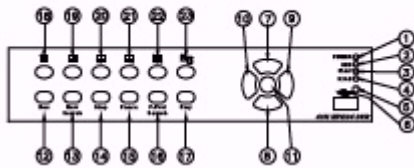

Back Panel Layout

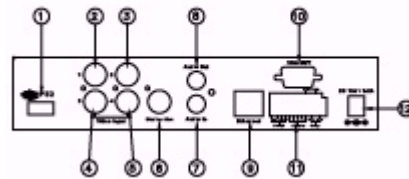

### Specifications

Model No.	GT 804M	
<b>Video</b>		
Mode	Triplex	
Image System	NTSC	PAL
Live-Time Resolution	720 x 480	720 x 576
Live-Time Display Rate	4 x 30 Frame/Sec	4 x 25 Frame/Sec
Split Screen	1, 4	
Video Input	BNC x 4	
Video Output (BNC)	BNC x 1	
Video Output (VGA)	Yes (Optional)	
<b>Audio</b>		
Audio Input	RCA x 1	
Audio Output	RCA x 1	
Audio Backup	Yes	
Audio Streaming	Yes	
<b>Recording</b>		
Compression Type	MPEG4	
Recording Resolution (Half D1)	720 x 240	720 x 288
Recording Resolution (CIF)	360 x 240	360 x 288
Recording Rate (Half D1)	720 x 240 up to 30 PPS	720 x 288 up to 25 PPS
Recording Rate (CIF)	360 x 240 up to 120 PPS	360 x 288 up to 100 PPS
Recording Mode	Manual/Schedule	
<b>Playback &amp; Search</b>		
Playback Speed	Fast Forward x2, x8, x16, x32, x64	

<b>Model No.</b>	<b>GT 804M</b>
	Fast Backward x32 Field by Field Playback Pause Slow Motion Playback x1/2, x1/4
Time Search	Yes
Event Search	Yes
<b>OSD &amp; Control Interface</b>	
Title	8 Characters
On Screen Display & Setup	Time / Date / Setup Menu
Graphic User Interface (GUI)	Yes
Mouse	Yes
IR Remote Controller	Yes
IE Browser	Yes
<b>Storage &amp; Backup Device</b>	
Internal HDD Support	SATA HDD x 1
USB Backup	Yes
<b>Network</b>	
Ethernet	Yes
Ethernet Compression Format	MPEG4
DDNS	Yes
Multi-Remote Client	Yes (5 clients at the same time available)
PDA / Cell Phone Support	Yes (MPEG4)
<b>Alarm</b>	
Motion Detection	Yes
<b>Setup &amp; Other Functions</b>	
Password Control	Two levels, one for the system, the other for the HDD format
Multi-Language	Yes
Firmware Update	USB Host
<b>Others</b>	
Power Input	DC 12V
Dimensions (W x H x D)	218mm (w) x 44mm (h) x 202mm (d)
Weight (Kg)	1.4Kg
Operation Temperature	0 – 40°C