




FEATURES

- Outdoor keypad with touch-sensitive steal membrane Grazing keypad light generated by LED light strips - Optical and acoustic system status signaling through buzzer and 7 signaling LED - Management of 4 programs - Connection via RS485 serial bus - Surface mounting - Prewired connection cable - Waterproof and vandal-proof aluminum die cast casing - Design by Pininfarina - IP65 - Dimensions (L x H x D) 81 x 121 x 24mm - Varnished aluminum

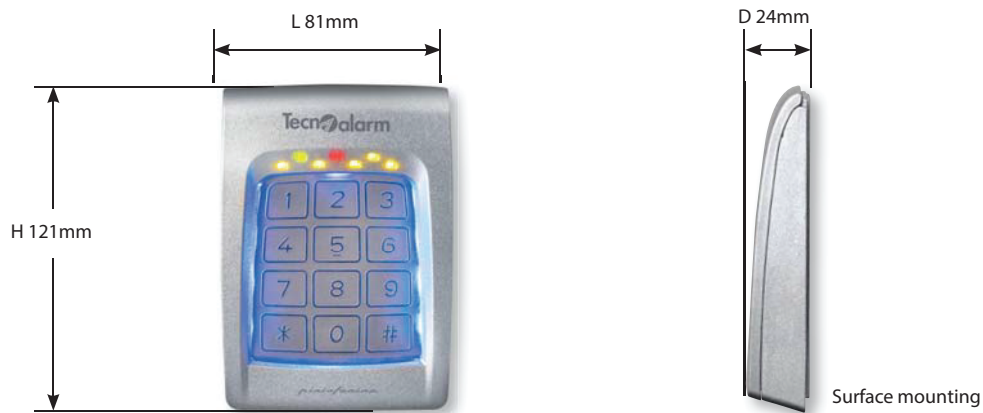

	DIGITEX						
Compatible systems: TP4-20 - TP4-20 GSM - TP8-28 - TP8-28 GSM - TP10-42 - TP8-88 - TP20-440							
Item no. F103DIGITEX							

SPECIFICATIONS

General features	Model	DIGITEX
	Address programming	Digital
	Connection	RS485
	Connection cable	6m prewired
	Keypad	Touch-sensitive steal membrane
	Optical system status signaling	7 LED
	Acoustic system status signaling	Buzzer
	Keypad light	LED light strips - Grazing light
	Programs managed	4
Anti-tamper protection	Anti-opening and anti-detachment	Magnetic - reed switch
	Anti-magnete	Magnetic - reed switch
	Casing	Vandal-proof

Electrical specifications	Rated voltage	12V DC
	Operating voltage	10V...15V DC
	Stand-by consumption	10mA @ 12V DC
	Max. consumption	136mA @ 12V DC
Physical specifications	Environmental class	IV
	Protection class	IP65
	Casing	Al
	Dimensions (L x H x D)	81 x 121 x 24mm
	Weight	510g
	Operating temperature	-25°C...+60°C
	Humidity (w/o condensation)	10%...93%